

Your alarm integrates intelligent system

SILENT INSTALLATION AND REMOVAL FEATURE


the battery:

- Remove the screw from the bottom of the unit, refer to Figure 3.
- Carefully slide out electronics assembly; do not pull or jerk on internal hook up

4/.put a plastic swell screw into the bottom of the hole.

action caused by the intrusion reaches the unit. It may take a few seconds for the alarm to react to the water action.

100dB Horn at 1meter

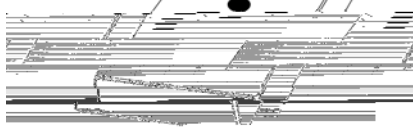

entry to the pool, and install a gate alarm.

the alarm to sound. On extremely windy days when the pool water is rocking it is advised to remove the alarm from the pool.



-DO read the manual carefully

-DO install a 9 volt battery